



A brand of **legrand®**

Operating Temp.Range: Discharge : -15 – 50°C (5 120°F); Charge : 0 – 40°C (5 104°F); Storage: -15 - 40°C (5 104°F)

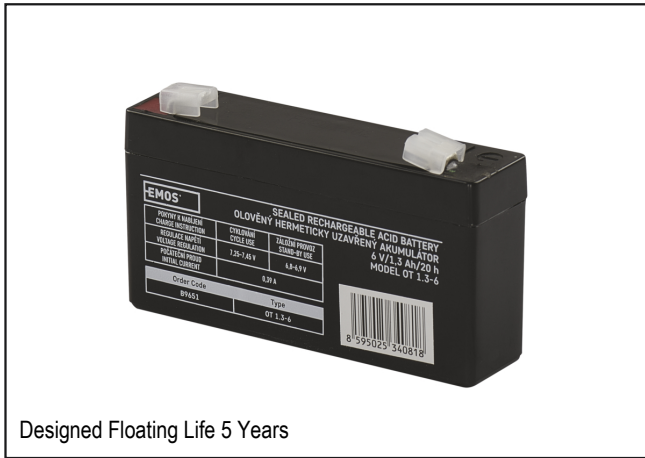

Designed Floating Life 5 Years

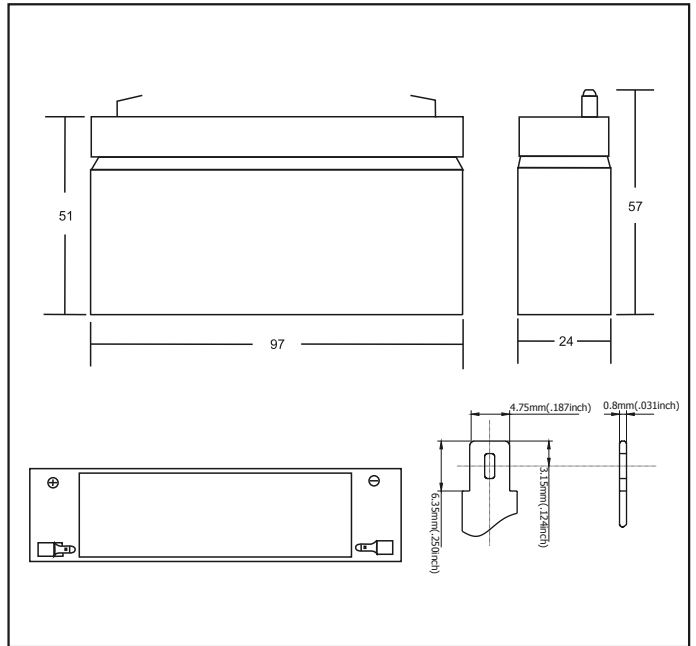

■ Specifications


OT 1.3-6		
Nominal Voltage	6V	
Rated Capacity (20 hours rate)	1.3Ah	
Dimension (±2mm)	Total Height (with terminals)	57mm
	Length	97mm
	Width	24mm
Weight (Approx)	Height	51mm
		0.3Kg

■ Characteristics

Capacity (25°C)	20 hours rate (0.065A)	1.3Ah
Discharge Current Testing (25°C)	20 I ₂₀ rate (1.3A, 27min)	36min
	60 I ₂₀ rate (3.9A, 7min)	8.5min
Internal Resistance	Full Charged Batter 25°C	65mΩ
Capacity Affected By Temperature (10 hours rate)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	62%
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%
	Capacity After 6 Months Storage	82%
	Capacity After 12 Months Storage	64%
Cycle Above 300 Time	Discharge 2hrs at 0.325A Current Charge 6hrs at 0.13A Current (25°C)	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 0.39A; Voltage 7.25~7.45V
	Float (25°C)	Charge Voltage 6.8~6.9V

★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

■ Discharge Current & Duration Time

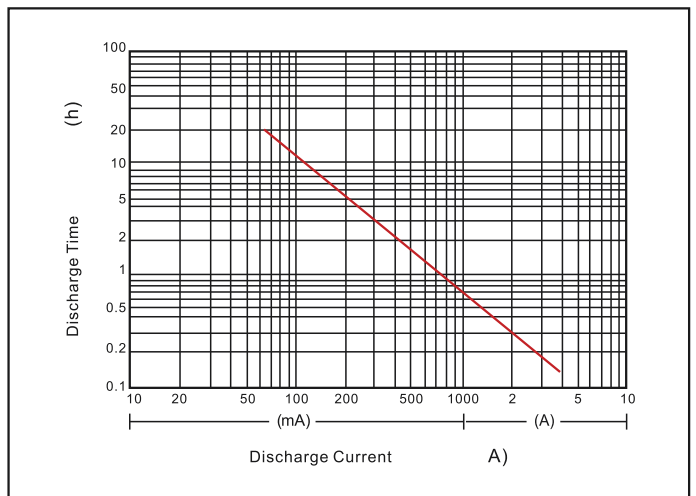

■ Discharge Current 25°C

